

Tension levers stainless steel

Item description/product images



Description

Material:

Steel parts stainless steel 1.4305.

Ball knob black plastic.

Version:

Stainless steel parts bright.

Ball knob polished.

Note:

Tension levers can be used for simple clamping or control operations.


Where applicable, there must be enough space available so that the grip can be rotated 360°.

On request:

Other internal threads, reamed holes and special versions.

Dimension "A" available in other lengths at extra charge.

Drawings

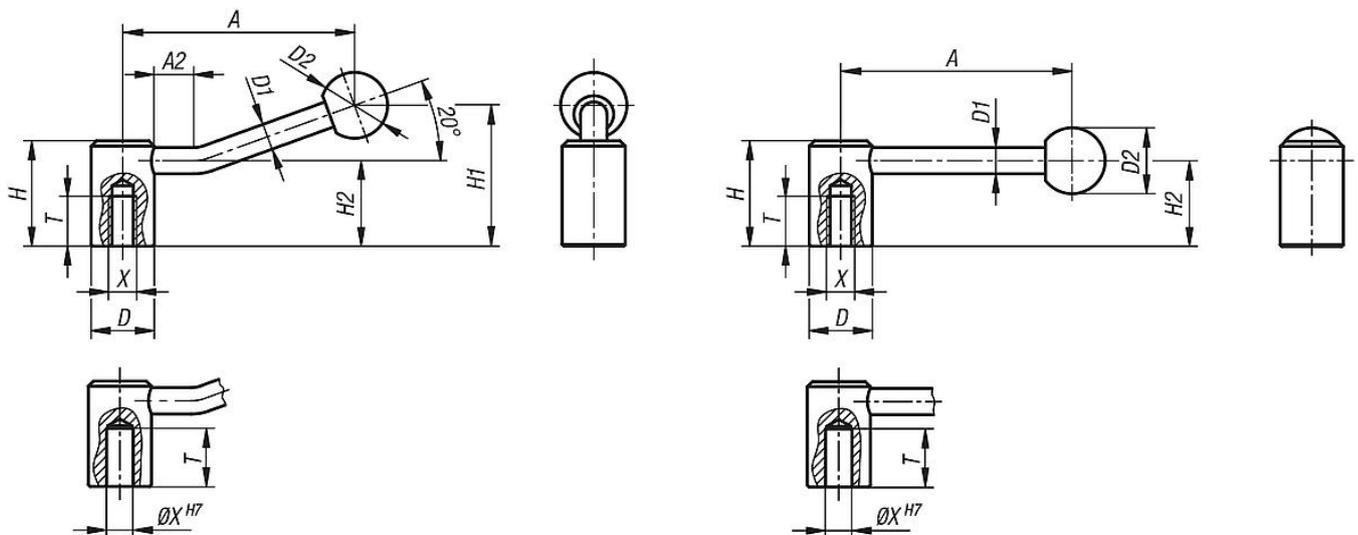

Overview of items

Tension levers stainless steel

Order No.	Thread type	Form	Size	X	T	D	D1	D2	H	H1	H2	A	A2
K1444.2082	internal thread	0°	1	M8	18	24	10	25	40	-	32,5	88,1	-
K1444.2102	internal thread	0°	1	M10	18	24	10	25	40	-	32,5	88,1	-
K1444.21012	internal thread	0°	2	M10	20	28	12	32	46	-	36,5	104	-
K1444.2122	internal thread	0°	2	M12	20	28	12	32	46	-	36,5	104	-
K1444.2162	internal thread	0°	3	M16	23	33	13	32	52	-	41	126,5	-
K1444.2202	internal thread	0°	4	M20	26	41	13	32	61	-	49	128,5	-
K1444.1102	reamed hole	0°	1	10	22	24	10	25	40	-	32,5	88,1	-
K1444.1122	reamed hole	0°	2	12	25	28	12	32	46	-	36,5	104	-
K1444.1142	reamed hole	0°	2	14	25	28	12	32	46	-	36,5	104	-
K1444.1162	reamed hole	0°	3	16	28	33	13	32	52	-	41	126,5	-
K1444.1202	reamed hole	0°	4	20	32	41	13	32	61	-	49	128,5	-

Tension levers stainless steel

Overview of items

Order No.	Thread type	Form	Size	X	T	D	D1	D2	H	H1	H2	A	A2
K1444.208	internal thread	20°	1	M8	18	24	10	25	40	52,5	32,5	84,5	15
K1444.210	internal thread	20°	1	M10	18	24	10	25	40	52,5	32,5	84,5	15
K1444.2101	internal thread	20°	2	M10	20	28	12	32	46	61	36,5	100	15
K1444.212	internal thread	20°	2	M12	20	28	12	32	46	61	36,5	100	15
K1444.216	internal thread	20°	3	M16	23	33	13	32	52	72	41	121	15
K1444.220	internal thread	20°	4	M20	26	41	13	32	61	80	49	123	15
K1444.110	reamed hole	20°	1	10	22	24	10	25	40	52,5	32,5	84,5	15
K1444.112	reamed hole	20°	2	12	25	28	12	32	46	61	36,5	100	15
K1444.114	reamed hole	20°	2	14	25	28	12	32	46	61	36,5	100	15
K1444.116	reamed hole	20°	3	16	28	33	13	32	52	72	41	121	15
K1444.120	reamed hole	20°	4	20	32	41	13	32	61	80	49	123	15